


Viscolite 700 s-series portable viscometer



Features

- ▶ convenient hand-held design
- ▶ integral temperature probe (optional)
- ▶ simple operation and cleaning
- ▶ no moving parts - no maintenance

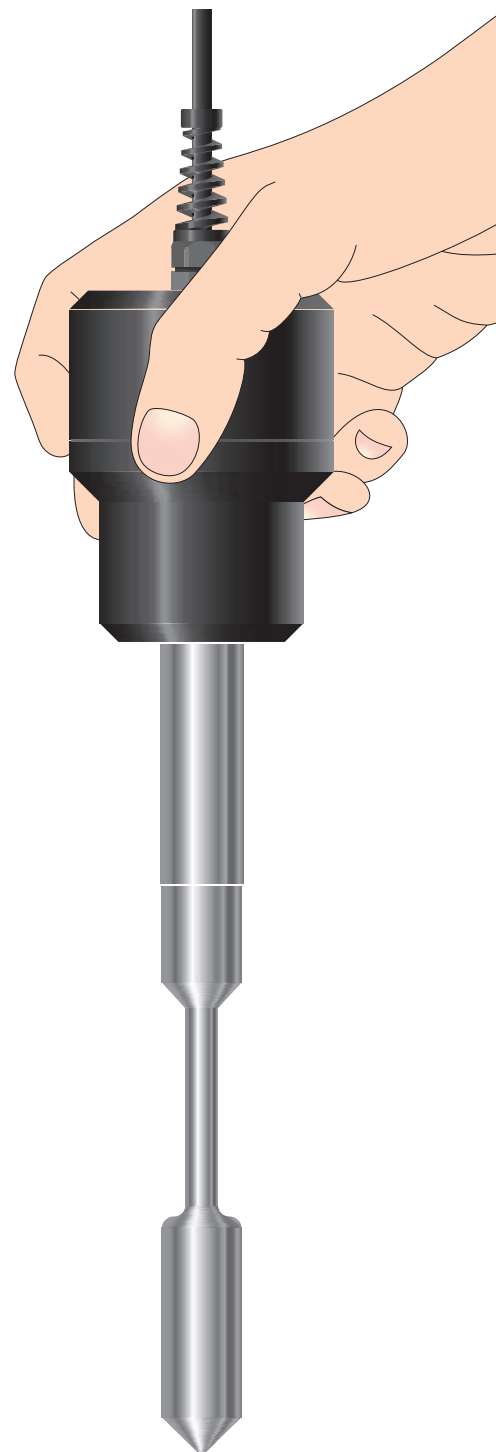

Specification

Transducer

Viscosity Accuracy:	+/- 2 % of reading
Complete Viscosity Range:	0.1 to 10,000 cP
Temperature Range (sensor):	-40°C to 150°C
Overall length:	300mm
Probe Weight:	700g
Readout Weight:	500g
Materials:	All 316 SS - wetted parts Acetal (Delrin®) - enclosure
Environmental Rating:	IP65
Safety Certification:	Safe area

Signal Processor

Processor Unit:	HP550
Environmental Rating:	IP65
Power Supply:	4 x AA (or equivalent) alkaline cells

Options:	- Integral temperature probe and viscosity correction - Highly polished sensing surface - Carrying case
----------	---

Hydramotion Ltd
1 York Road Park,
Malton, York,
England YO17 6YA

tel: +44 (0) 1653 600294
fax: +44 (0) 1653 693446
mail@hydramotion.com
www.hydramotion.com